

Wheel Brightz™

Instructions

©Copyright Brightz, Ltd. 2018
Patent Pending • All rights reserved

Step 1 – Install Batteries


Open latches on the side of the battery pack to access batteries. Install 3 fresh AA batteries, observing correct polarity (+/-). Close the battery pack, making sure the latches snap shut.



Do not mix old and new batteries and do not mix alkaline, standard (carbon-zinc) or rechargeable (nicad, ni-mh, etc.) batteries.



Caution: *Batteries may explode or leak, and cause burn injury if recharged, disposed of in fire, mixed with a different battery type, or inserted backwards. Replace all used batteries at the same time. Clean battery contacts and contacts on the device prior to installing. Remove batteries if item will not be used for long periods of time. When battery expires remove promptly.*

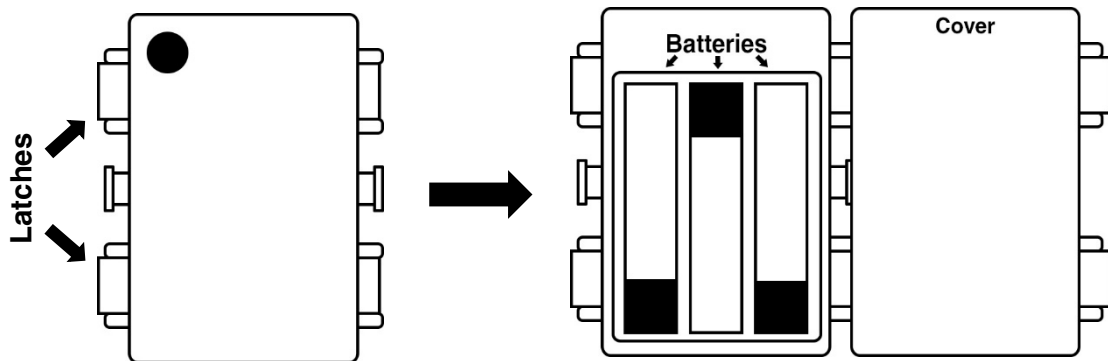


Step 2 – Install Battery Pack

Take the silicon strap and loop one of the end holes over the T-hook on the side of the battery pack. Place the battery pack in the space between the spokes, between 2 cross sections, pull the silicon strap around the cross section, and secure it tightly on the other T-hook. Any excess strap can be cut off.




Warning: *Do not mount the battery pack near or on moving parts, or where it has the potential to interfere with moving parts.*

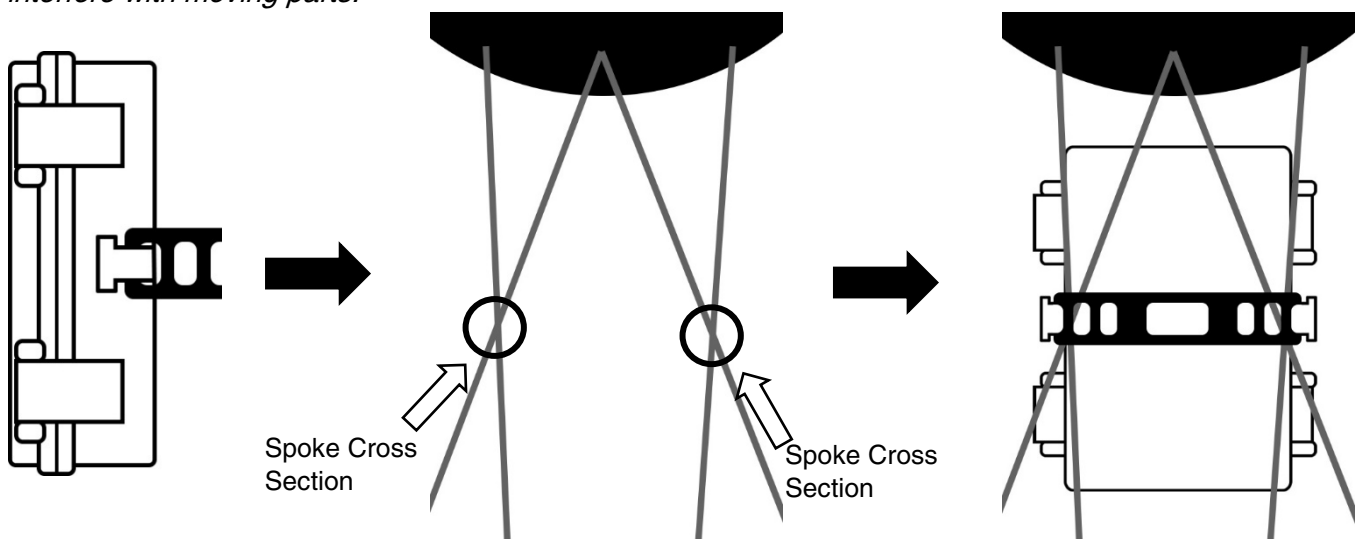


Step 3 – Insert the Lights

Insert the clear tubing with the LED lights into the “hollow” area between the spokes of the wheel.




Step 4 – Place Connector

Place the connector next to the base of a spoke. Connector does not snap in.

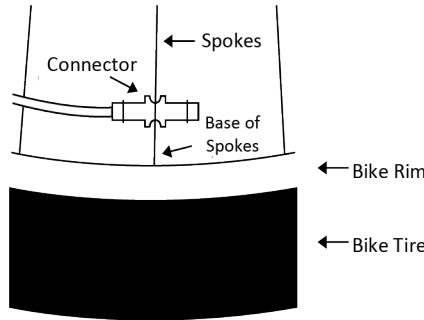

Step 5 – Push Tube to Rim


Push the clear tube to the rim of the wheel. Starting at the connector continue all the way around the rim until you reach back to the connector.



Step 6 – Perfect Circle or Fill Wheel (What size is your wheel?)


Wheels 24 inches and larger:

It is recommended to create a perfect circle by cutting the clear tube and LED string with a pair of scissors to the proper length to be able to connect the end of the tube to the connector piece. Always cut the tube longer than you think is necessary. If you cut the tube too short, use the included zip ties to fasten the tubing to the spokes.




Wheels smaller than 23 inches:

it is recommended to fill the wheel with the remaining clear tube and fasten the tube with the included zip ties.



Step 7 – Securing cord

Wrap the cord around a spoke and secure it using one of the zip ties.

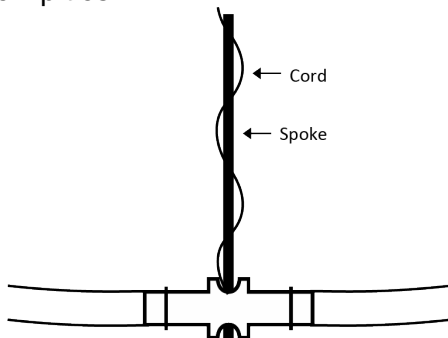

Important Information:

This product will work on most bike wheels larger than 20”. This product will not work on wheels with an abnormally high or low number of spokes.

Caution!

After installation is complete make sure to check that no parts interfere with the operation of the bicycle!

Maintenance

Clean with mild soap and water.

Brightz, Ltd.

8000 Yankee Road, Suite 225, Ottawa Lake, MI 49267

Email: info@brightz-ltd.com

Visit us at www.brightz-ltd.com for more fun products!